


# SWITCH TIMERS

## Function:

switch electric contacts ON/OFF



Standard features	MT - MTS 49	MT - MTS 59	IT 51 - 52 - 53 - 54 ITS 55 - 56 - 57
1. running times	1' - 4' - 6' - 7' 10' - 15' - 20' - 30'	30' - 45' - 60' 90' - 100' - 120'	6' - 15' - 30' - 45' 60' - 90' - 120' - 180'
2. number of poles	on request: 1 or 2 poles	on request: 1 or 2 poles	on request: 1 or 2 poles
3. OPTIONAL	switching wheel setting "continuously ON" or "continuously OFF" as desired		
4. acoustic signal	Gong: optional	Gong: optional	Long Ring 2.5 sec: optional
5. operating temperature	T 125°C	T 125°C	T 125°C
6. shaft diameter	5-6-7 mm	5-6-7 mm	5-6-7 mm
7. shaft length	on request	on request	on request
8. shaft milling	on request	on request	on request
9. shaft position	on request	on request	on request
10. dimensions (mm) with acoustic signal	40.5 x 51.5 x 45.6	43 x 58.5 x 52	ITS 55-56: diameter: 59 - thickness: 38.2 ITS 57: diameter: 59 - thickness: 43.8
11. dimensions (mm) without acoustic signal	40.5 x 51.5 x 27.6	43 x 58.5 x 33.6	IT: 51 x 56 x 38
12. life cycles	10.000	10.000	10.000
13. AQL	0,65	0,65	0,65
14. accuracy	±10%	±3%	±3%
15. load current	16(3)A 250Vac T 125°C <b>ENEC 03</b> 13(2)A 250Vac T 110°C <b>UL-CSA</b> 15(2)A 120 Vac T 110°C <b>UL</b> 15(4)A 120 Vac T 85°C <b>UL</b>	10(2)A 400Vac T 125°C <b>ENEC 03</b> 16(3)A 250Vac T 125°C <b>ENEC 03</b> 13(2)A 250Vac T 110°C <b>UL-CSA</b> 15(2)A 120 Vac T 110°C <b>UL</b> 15(4)A 120 Vac T 85°C <b>UL</b>	16(3)A 250Vac T 125°C <b>ENEC 03</b> IT 16(1/4 hp)A <b>UL</b>
16. conformity with	EN 60730-2-1	EN 60730-2-1	EN 60730-2-1
17. APPROVALS	<b>ENEC 03 - UL - CSA</b>	<b>ENEC 03 - UL - CSA</b>	<b>ENEC 03 - UL</b>

CUSTOMIZED PRODUCTS AVAILABLE ON REQUEST




Automática Electrónica y Control, S.L. Lacy, 30 Acc. - 08202 Sabadell (Barcelona)  
Tel 93 720 70 66 Fax 937 209 999 www.automatrica-elec.es info@automatrica-elec.es




**REFERENCIA**

MT-49 (4' 6' 10' 15' 20' y 30')

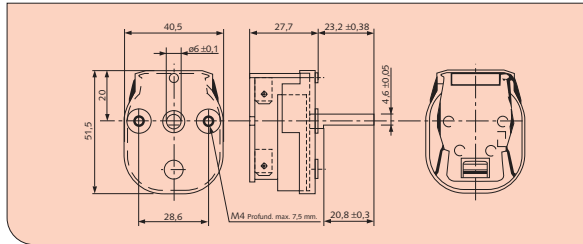


**REFERENCIA**

MTS-49 (4' 6' 10' 15' 20' y 30')

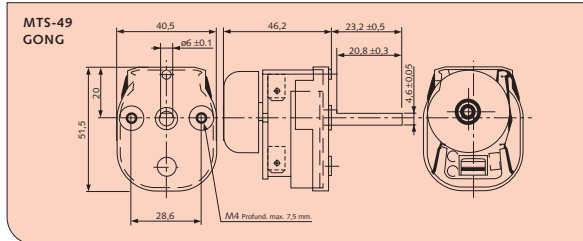


**REFERENCIA**

MT-59 (60' 90' y 120')

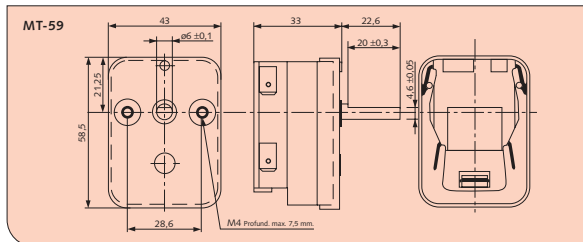

**REFERENCIA**

MTS-59 (60' 90' y 120')

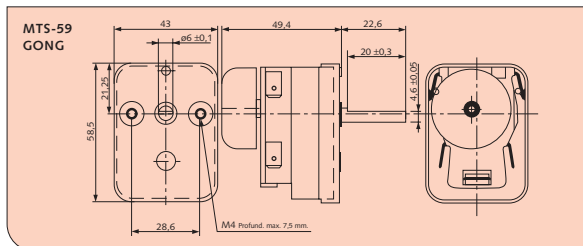

BMSG-1

**Diámetro 43 mm**  
Sin serigrafía



BMSG-2

**Diámetro 49 mm**  
Sin serigrafía



BM

**Diámetro 49 mm**  
Tiempos disponibles:  
15, 30, 30, 60 y 120 Minutos